



## LS304-51N

### LS Series–Level Sensor

#### Features

- High or low level sensing
- Internal or external fitting
- Reed Switch reliability
- Nitrile sealing washer/grommet
- Easy installation

#### Applications

- Chemical high or low level
- Diesel Fuel
- Fuel low level
- Alcohols
- Low Oil Detection

#### Comments

- High or low level sensing, single pole double throw
- Normally open or normally closed by rotating through 180
- Suitable for a wide range of liquids
- Interface option available
- Nylon 6.6 Material

#### Material

<b>Housing Material</b>	Glass Filled Nylon 6.6
<b>Float Material</b>	Glass Filled Nylon 6.6
<b>Contact Material</b>	Ruthenium
<b>Float SG</b>	0.85
<b>Operating Temperature °C</b>	-30 to 130
<b>Medium</b>	Fuels, Oils, Alcohols
<b>Housing and Float Color</b>	Blue

#### Cable

<b>Cable Length</b>	3 x 0.5M single insulated
<b>Connection Type</b>	Stripped Cables
<b>Cable Type</b>	24AWG, 7/0.2mm PVC insulated
<b>Cable Color</b>	Yellow/Blue/Black

#### Mechanical Specifications

<b>Shock</b>	50g for 11mS duration
<b>Vibration</b>	35g up to 500Hz
<b>Maximum Pressure</b>	4.7 Bar
<b>IP</b>	IP65

#### Mounting

<b>Thread</b>	M16
<b>Fitment</b>	Universal Internal or External
<b>Mounting</b>	Horizontal

# LS304-51N


LS Series—Level Sensor

## Switching

Switch Action (Reed Switch)	SPDT
Max Switching Voltage VDC	175
Max Switching Voltage VAC	125
Max Switching Current Amps	0.4A DC/0.28A AC
Max Switching Load Watt	5
Operate Mode	N/C with float horizontal
Contact Form	C

## Technical Drawing

### Internal Fitting

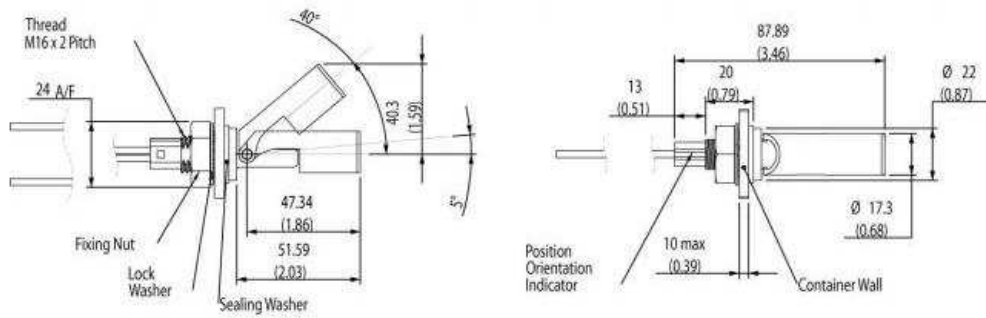

### External Fitting

