

The PT5E encoder-based cable-extension transducer offers a unique thermoplastic cable that has virtually an infinite fatigue life. This cable, known as V62, has properties that are superior for high cycle and rugged applications.

Like our other transducers, the PT5E installs in minutes, functions properly without perfectly parallel alignment, and fits easily into small areas. The PT5E offers additional installation flexibility since its cable exit can be rotated relative to the mounting surface, providing four different cable exit orientations.

# PT5E

## Cable Actuated Sensor

### Industrial Grade • Incremental Encoder

**Absolute Linear Position to 250 inches (6350 mm)**

**Hard Anodized Aluminum Enclosure**

**High Cycle Applications**

**IP67 • NEMA 6 Protection**

#### GENERAL

<b>Full Stroke Range Options</b>	0-50 to 0-250 inches
<b>Output Signal Options</b>	incremental encoder (quadrature)
<b>Accuracy</b>	.04% to .1% f.s. – see ordering info
<b>Repeatability</b>	.01% to .02% f.s. – see ordering info
<b>Resolution</b>	10 to 250 pulses per inch
<b>Measuring Cable Options</b>	stainless steel or thermoplastic
<b>Enclosure Material</b>	hard anodized aluminum
<b>Sensor</b>	optical encoder
<b>Max Measuring Cable Velocity</b>	see ordering information
<b>Max Retraction Acceleration</b>	see ordering information
<b>Weight</b>	5 lbs. max.


#### ELECTRICAL

<b>Input Voltage</b>	see ordering information
<b>Input Current</b>	see ordering information

#### ENVIRONMENTAL


<b>Enclosure</b>	NEMA 4/6, IP 65/67
<b>Operating Temperature</b>	0° to 160°F (-17° to 71°C)
<b>Vibration</b>	up to 10 g to 2000 Hz maximum

#### Output Signal

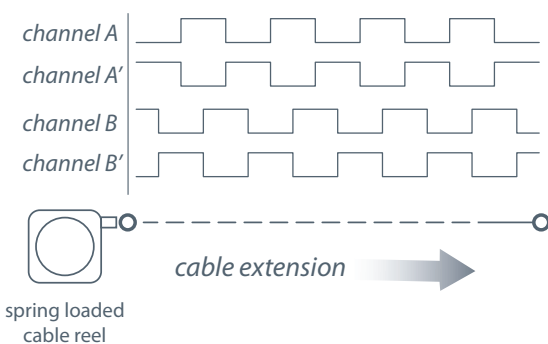



-- see ordering information for available channels

**Outline Drawing:**

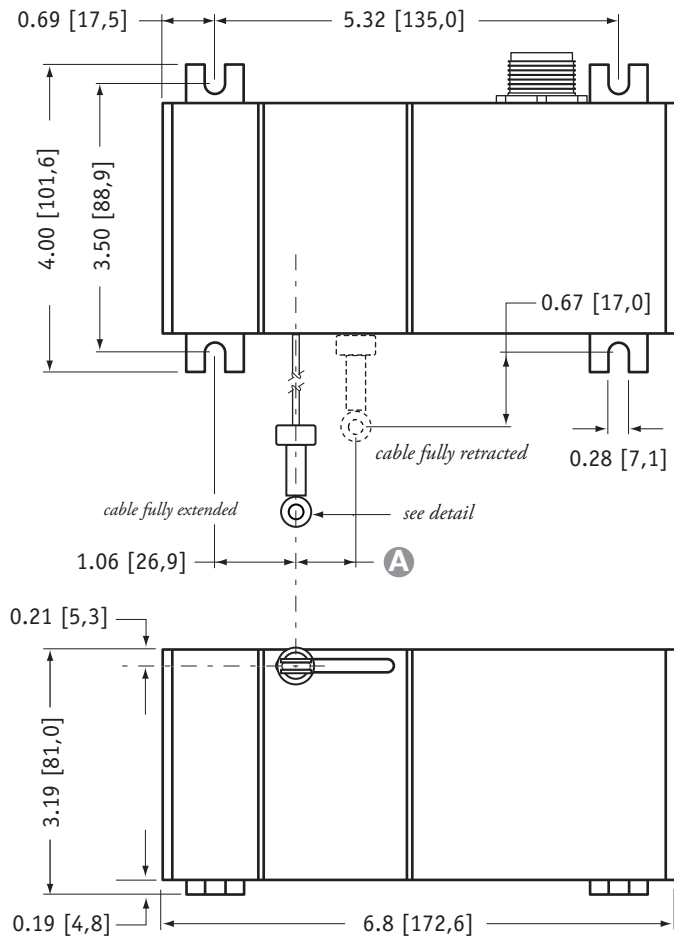

<b>A DIMENSION (inches[mm])</b>		
<b>RANGE</b>	<b>N34 measuring cable</b>	<b>S47 &amp; V62 measuring cable</b>
50	0.23 [5,9]	0.39 [9,9]
100	0.46 [11,7]	0.78 [19,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

**eyelet detail**

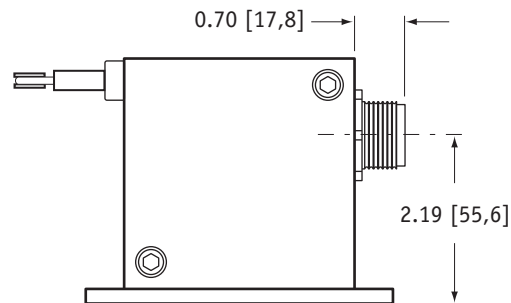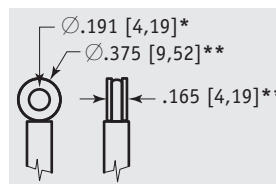

DIMENSIONS ARE IN INCHES [MM]  
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

\* tolerance = +.005 -.001 [+,.13 -.03]  
\*\* tolerance = +.005 -.005 [+,.13 -.13]

**Ordering Information:**

**Model Number:**



Sample Model Number:

**PT5E - 100 - N34 - FR - 100 - AB-TTL - M6**

- R** range: 100 inches
- A** measuring cable: .034 nylon-coated stainless front
- B** cable exit: front
- C** resolution: 100±2 pulses per inch
- D** output signal: TTL/CMOS compatible driver
- E** electrical connection: 6-pin plastic connector


**Full Stroke Range:**

<b>R order code:</b>	<b>50</b>	<b>100</b>	<b>150</b>	<b>200</b>	<b>250</b>	<b>1250</b>	<b>2500</b>	<b>3750</b>	<b>5000</b>	<b>6250</b>
full stroke range, min:	50 in.	100 in.	150 in.	200 in.	250 in.	1250 mm	2500 mm	3750 mm	5000 mm	6250 mm
△ accuracy (± % of f.s.):	.1	.07	.06	.05	.04	.1	.07	.06	.05	.04
repeatability (± % of f.s.):	.02	.01	.01	.01	.01	.02	.01	.01	.01	.01
cable tension (±20%):	41 ounces			21 ounces			11,4 N		5,8 N	
cable velocity • acceleration:	300 in./sec • 5 g			120 in./sec • 2 g			8 M/sec • 5 g		3 M/sec • 2 g	

## Ordering Information (cont.):


### Measuring Cable:

**A** order code:

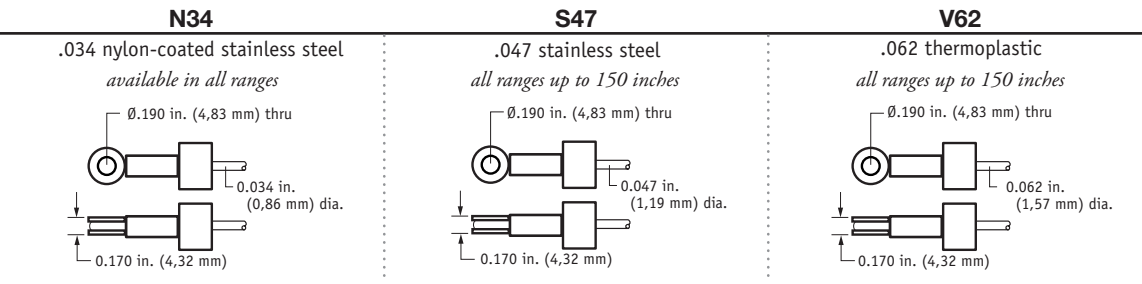

### Cable Exit:

**B** order code:

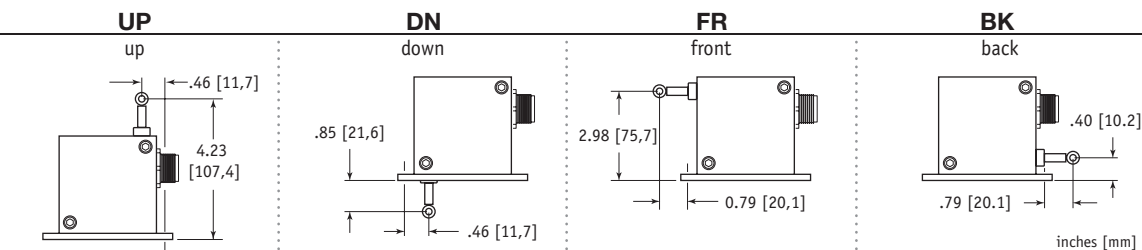

### Resolution:

**C** order code:

	<b>10</b>	<b>100</b>	<b>200</b>	<b>250</b>
resolution for <b>english</b> ranges:	10 ±0.2 pulses per inch	100 ±2 pulses per inch	200 ±4 pulses per inch	250 ±5 pulses per inch






**D** order code:

	<b>.5</b>	<b>5</b>	<b>10</b>	<b>12.5</b>
resolution for <b>metric</b> ranges:	0.5 ±0.01 pulses per mm	5 ±0.1 pulses per mm	10 ±0.2 pulses per mm	12.5 ±0.3 pulses per mm

### Output Signals:










**E** order code:

	<b>AB-TTL</b>	<b>AB-OC</b>	<b>ABC-LD</b>	<b>ABC-UD</b>	<b>ABZCUD</b>
output driver:	TTL/CMOS compatible	open collector	5-volt line driver	universal line driver <i>(no index)</i>	universal line driver <i>(with index)</i>
input voltage:	4.5...13.2 VDC	10.8...26.4 VDC	5 VDC	5...30 VDC	5...30 VDC
max. source/sink current:	20 mA sink	20 mA sink	20 mA sink	20 mA source/sink	20 mA source/sink
max. input current:	80 mA	80 mA	150 mA	100 mA, no load	100 mA, no load



## Ordering Information (cont.):

### Electrical Connection:

order code:	MC4	M6	M6M	M18	C25		
	4-pin micro-connector with 12 ft [3.5 M] cord set	6-pin plastic connector with mating plug	6-pin metal connector with mating plug	18-pin plastic connector with mating plug	25-ft. instrumentation cable 24 AWG, shielded		
	<b>IP 67, NEMA 6</b>	<b>IP 67, NEMA 6</b>	<b>IP 65, NEMA 4</b>	<b>IP 67, NEMA 6</b>	<b>IP 67, NEMA 6</b>		
							
<b>4-pin cordset:</b>		<b>6-pin mating plug:</b>					
	<b>pin</b> 1 2 3 4	<b>color code</b> RED-BLK TR. RED-WHT TR. RED GREEN	<b>TTL/CMOS</b> <b>Open Collector</b> input voltage channel A channel B common		<b>pin</b> A B C D E F	<b>TTL/CMOS</b> <b>Open Collector</b> input voltage common channel A channel B - -	<b>5 V Line Driver</b> <b>Universal Line Driver</b> input voltage common channel A channel B channel A' channel B'
<b>18-pin mating plug:</b>		<b>25-ft. instrumentation cable:</b>					
	<b>pin</b> 1 2 3 6 7 11 12 15	<b>TTL/CMOS</b> <b>Open Collector</b> input voltage common channel B channel A - - -	<b>5 V Line Driver</b> <b>Universal Line Driver</b> input voltage common channel B channel A index channel B' channel A' index'		<b>color</b> red black green white blue brown yellow orange	<b>TTL/CMOS</b> <b>Open Collector</b> input voltage common channel A channel B - - -	<b>5 V Line Driver</b> <b>Universal Line Driver</b> input voltage common channel A channel B channel A' channel B' index index'

 Total accuracy includes uncertainty due to resolution and is calculated:  $\{ \pm [(\%FS)(FS) + \text{length of 1 pulse}] \}$

Example: Model Number: PT5E-100-N34-FR100-AB-TTL-M6

Full Stroke: 100 inches

Accuracy:  $[.07\% (100 \text{ in.}) + 1/100 \text{ in.}] = \pm .08 \text{ inches}$